

宁波宏韵电子有限公司

HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

A。电气性能 Electrical specifications

1	总阻值 Total Resistance	电位器 1~3 端全部电阻值。 Measurement shall be made by the resistance between terminals R1and R3.	100Ω ~2MΩ
2	阻值线性 Resistance taper	电阻值变化规律 Resistance changes	A: 指数 Log B: 直线 Linear C: 对数 Alog
3	总阻值允许差 Total Resistance tolerance	电位器 1~3 端总阻值之公差。 Measurement shall be made by the resistance tolerance between terminal R1 and R3.	100Ω ~1MΩ ±20% 1MΩ ~ 2MΩ ±30%
4	额定功率 Rated power	电位器 1~3 端能连续承受之最大之功率 Rated power is based on continuous full load operation at the maximum voltage between terminal R1 and R3.	0.1W(50℃)
5	残留电阻 Residual resistance	电位器 1~2 端(将轴心旋转至 1 端底部测) 及 2~3 端 (将轴心旋转至 3 底部测) 残留 Test residual resistance between terminal R1 andR2;terminal R2 andR3	R≤10KΩ R ₀ ≤20Ω 10KΩ<R≤100KΩ R ₀ ≤30Ω 100KΩ<R≤250KΩ R ₀ ≤50Ω R≥250KΩ R ₀ ≤0. 1%
6	转动噪声 rotation of noise	轴心从电位器 1 端以 30 转/分匀速旋转至 3 端时电位器所呈现之杂音情况 The murmur will appear when shaft turn from terminal 1 to terminal 3 by 30 rounds/minute equably speed.	≤100mV
7	最高使用电压 Max operating voltage	电位器 R1—R3 端所承受的最大电压 Maximal voltage which sustained by terminal R1 and R3	50V DC
8	使用温度范围 Operating temperature	保证电位器各项性能的适合使用环境温度 Potentiometer of the performance guarantee for the use ambient temperature	-25℃ ~70℃
9	有效电阻角度 Electrical Rotation angle	电阻有效变化角度 Resistance effective changes in perspective	210°±10°

宁波宏韵电子有限公司

HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

B。机械性能 Mechanical specifications


1	旋转角度 Total rotation angle	指轴置于 1 端最底部转往 3 端最底部之旋转角度 The angle is measured by rotating shaft from the end of terminal R1 to the end of terminal R3.	240°±10°
2	回转力矩 Rotation torque	指轴在周围温度 5°C~35°C 以每秒钟 60°匀速转动所需之力矩 Rotational torque when turn the shaft :without special provision, rotational speed is 60°/s in ambient temperature 5-35°C	20-350gf.cm
3	止档强度 Stop torque	轴从 1 端转至止档点或从 3 端转至止档点 10 秒后直至破坏之力量 The force that shaft transfer from terminal 1 to stop point or terminal 3 to stop point after 10 seconds until be break	0.5kgf.cm

C。其它 Other


1	使用寿命 Rotation life	经过 100 旋转测试后，总阻变化不超过± (15%R+0.5Ω) 转动噪声不大于 100mv After 100 rotation after the test, the changes impacted no more than ± (15% R +0.5 Ω) rotational noise of not more than 100 mv	
2	端子强度 Terminal strength	经过焊接 (350°C, 3.5 秒) 后端子不得有接触不良或松动现象 After welding (350 °C, 3.5 seconds) after the termination of terminal contacts should be good, no loosening of	
3	可焊性 Soldering ability	240°C ±5°C, 持续时间 2S ±0.5S, 焊锡覆盖面积大于 90% 以上。 Dip the terminals into tin tank at 240°C±5°C for 2±0.5 seconds, the soldering area should be more than 90%.	

宁波宏韵电子有限公司
HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

电阻规律理论曲线图

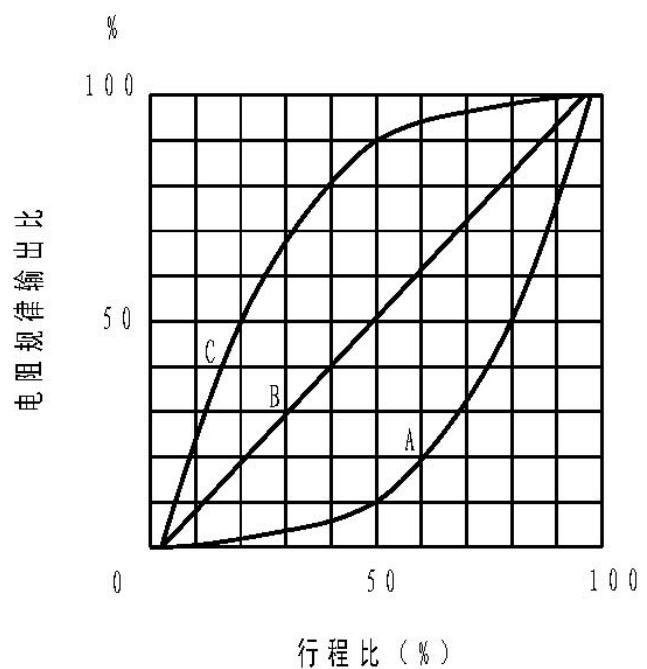

功率温度表

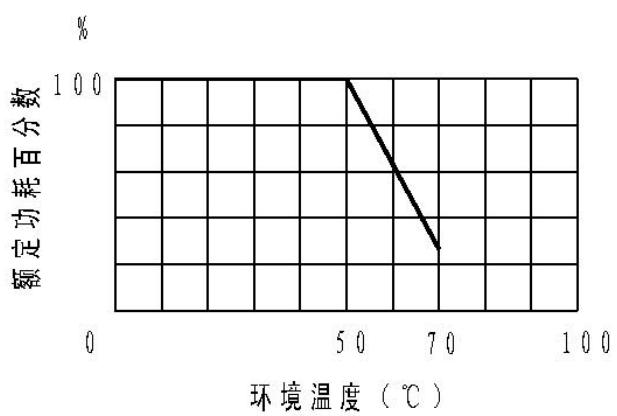

宁波宏韵电子有限公司
HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

阻值简码表
Resistance SR code table

阻值 Resistance	代码 Code
100 Ω	101
500 Ω	501
1K Ω	102
2K Ω	202
3. 3K Ω	332
4. 7K Ω	472
5K Ω	502
10K Ω	103
20K Ω	203
22K Ω	223
47K Ω	473
50K Ω	503
100K Ω	104
200K Ω	204
250K Ω	254
500K Ω	504
1M Ω	105
2M Ω	205