

宁波宏韵电子有限公司

HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

A。电气性能 Electrical specifications

1	总阻值 Total Resistance	电位器 1~3 端全部电阻值。 Measurement shall be made by the resistance between terminals R1 and R3.	100Ω ~2MΩ
2	阻值线性 Resistance taper	电阻值变化规律 Resistance changes	A: 指数 Log B: 直线 Linear C: 对数 Alog
3	总阻值允许差 Total Resistance tolerance	电位器 1~3 端总阻值之公差。 Measurement shall be made by the resistance tolerance between terminal R1 and R3.	100Ω ~ 1MΩ ±20% 1MΩ ~ 2MΩ ±30%
4	额定功率 Rated power	电位器 1~3 端能连续承受之最大之功率 Rated power is based on continuous full load operation at the maximum voltage between terminal R1 and R3.	2W(50℃)
5	残留电阻 Residual resistance	电位器 1~2 端(将轴心旋转至 1 端底部测)及 2~3 端(将轴心旋转至 3 底部测)残留 Test residual resistance between terminal R1 and R2; terminal R2 and R3	R ≤ 10KΩ R ₀ ≤ 20Ω 10KΩ < R ≤ 100KΩ R ₀ ≤ 30Ω 100KΩ < R ≤ 250KΩ R ₀ ≤ 50Ω R > 250KΩ R ₀ ≤ 0.1%
6	转动噪声 rotation of noise	轴心从电位器 1 端以 30 转/分匀速旋转至 3 端时电位器所呈现之杂音情况 The murmur will appear when shaft turn from terminal 1 to terminal 3 by 30 rounds/minute equably speed.	≤ 47mV
7	耐电压 Voltage proof	在电位器端子与外壳之间加以电压 1 分钟以上 Input more then one minute voltage between terminals and shell.	1000V AC
8	最高使用电压 Max operating voltage	电位器 R1-R3 端所承受的最大电压 Maximal voltage which sustained by terminal R1 and R3	500V AC
9	绝缘阻抗 Insulation resistance	测试电压: DC 500V 测试位置: 端子与外壳间 Test voltage: DC 500V, Test position: Between terminal and case	≥ 200MΩ

宁波宏韵电子有限公司

HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

B。机械性能 Mechanical specifications

1	旋转角度 Total rotation angle	指轴置于 1 端最底部转往 3 端最底部之旋转角度 The angle is measured by rotating shaft from the end of terminal R1 to the end of terminal R3.	$312^{\circ} \pm 10^{\circ}$
2	回转力矩 Rotation torque	指轴在周围温度 $5C^{\circ} \sim 35C^{\circ}$ 以每秒钟 60° 匀速转动所需之力矩 Rotational torque when turn the shaft without special provision, rotational speed is $60^{\circ}/s$ in ambient temperature $5-35^{\circ}C$	$150 \sim 450gf.cm$
3	止档强度 Stop torque	轴从 1 端转至止档点或从 3 端转至止档点 10 秒后直至破坏之力量 The force that shaft transfer from terminal 1 to stop point or terminal 3 to stop point after 10 seconds until be break	$\geq 12kgf.cm$


C。其它 Other

1	使用寿命 Rotation life	经过 100,000 旋转测试后, 总阻变化不超过 $\pm (15\%R + 0.5\Omega)$ 转动噪声不大于 100mv After 100,000 rotation after the test, the changes impacted no more than $\pm (15\% R + 0.5 \Omega)$ rotational noise of not more than 100 mv	
2	端子强度 Terminal strength	经过焊接 ($350^{\circ}C$, 3.5 秒) 后端子不得有接触不良或松动现象 After welding ($350^{\circ}C$, 3.5 seconds) after the termination of terminal contacts should be good, no loosening of	
3	可焊性 Soldering ability	$260^{\circ}C \pm 5^{\circ}C$, 持续时间 $2S \pm 0.5S$, 焊锡覆盖面积大于 90% 以上。 Dip the terminals into tin tank at $260^{\circ}C \pm 5^{\circ}C$ for 2 ± 0.5 seconds, the soldering area should be more than 90%.	


宁波宏韵电子有限公司

HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

电阻规律理论曲线图

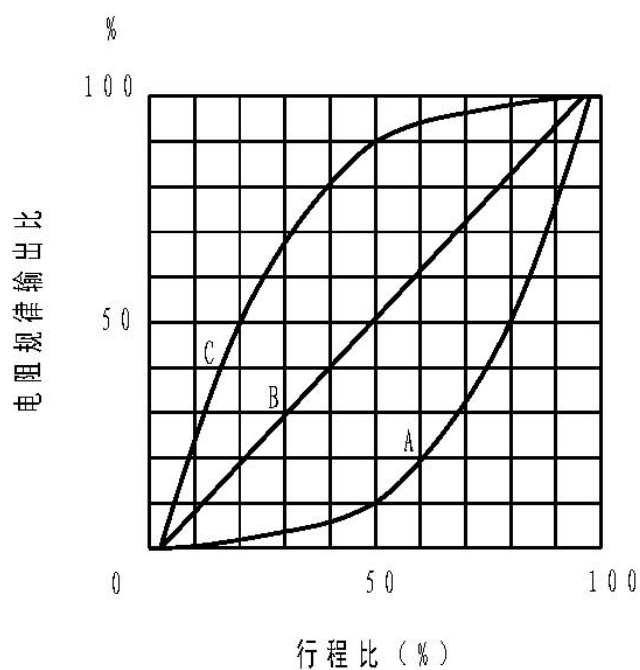

功率温度表

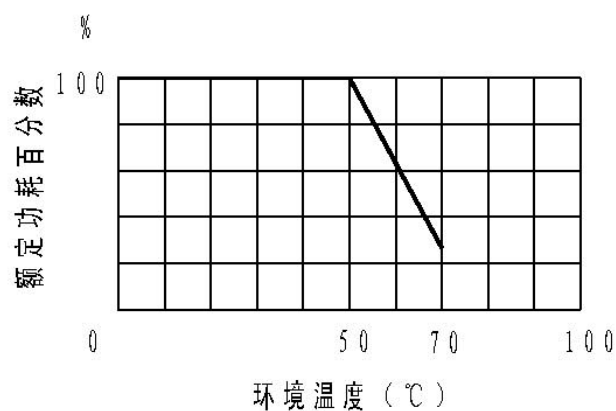

宁波宏韵电子有限公司

HUNGYUN ELECTRONICS(NINGBO) CO.,LTD

阻值简码表
Resistance SR code table

阻值 Resistance	代码 Code
100 Ω	101
500 Ω	501
1K Ω	102
2K Ω	202
3.3K Ω	332
4.7K Ω	472
5K Ω	502
10K Ω	103
20K Ω	203
22K Ω	223
47K Ω	473
50K Ω	503
100K Ω	104
200K Ω	204
250K Ω	254
500K Ω	504
1M Ω	105
2M Ω	205